


## Congratulations on purchasing an EDISION primo IP S2

Please note that this information is valid at the time of publication.

Current information and detailed user manuals can be found on the Internet at: [www.edision.gr](http://www.edision.gr)

### 1 Unpacking



Remote control with 2 AAA batteries



Documentation



Service note

Please contact your EDISION specialist dealer for any further support and service.

#### Receiver primo IP S2

**Notes:** The front is factory fitted with a protective foil which can be removed easily and with caution. (Protective foil only for devices with display)

The scope of delivery may also include parts not listed here


#### Front Panel

- ① POWER button: Activates/Deactivates the device
- ② CH- / CH+ buttons: for moving in the program lists
- ③ Infrared sensor for the reception of remote control commands
- ④ Display LED, displays current information
- ⑤ Card reader




#### Back Panel

- ⑥ LNB IN: Connection for the coaxial cable to the signal from the satellite system
- ⑦ S/PDIF: Audio interface for amplifier/audio console
- ⑧ ETHERNET: Ethernet port RJ45 10/100 Mbps
- ⑨ HD OUT: Connection to an HDTV quality TV
- ⑩ SCART: For connecting to a TV set, using SCART cable [not for HD TV]
- ⑪ Connection for an adapter (DC 12V/1,0A)

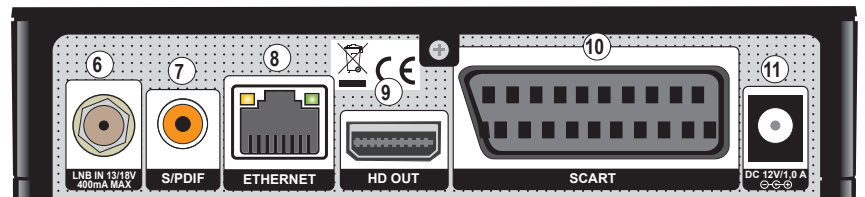

#### Subpages


- ⑫ USB / 2 x USB: Connection for USB storage devices
- ⑬ RS 232: For connecting to a PC, for receiver software update.
- ⑭ IR IN: Infrared connection port

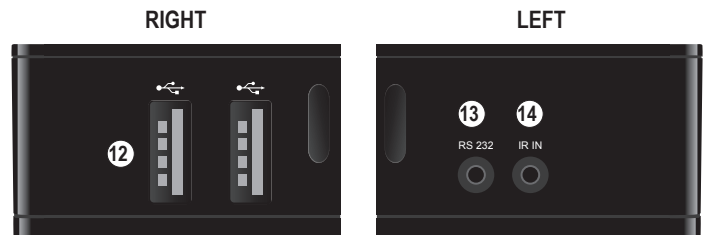

### 2 Connecting and switching on

**Note:** For interference-free satellite TV reception, a specialist technician must calibrate your satellite TV system with a digital TV level meter

- Connect the receiver using **HDMI cable** via the HD OUT output port to your TV's HD OUT input port
- Now connect the receiver to the satellite antenna cable via the **LNB IN** input.
- Insert the batteries into the remote control. Notes on the remote control can be found on the back of these instructions.
- Connect the receiver to the power supply.
- The receiver starts with the **BOOT** process and is operational within a short time

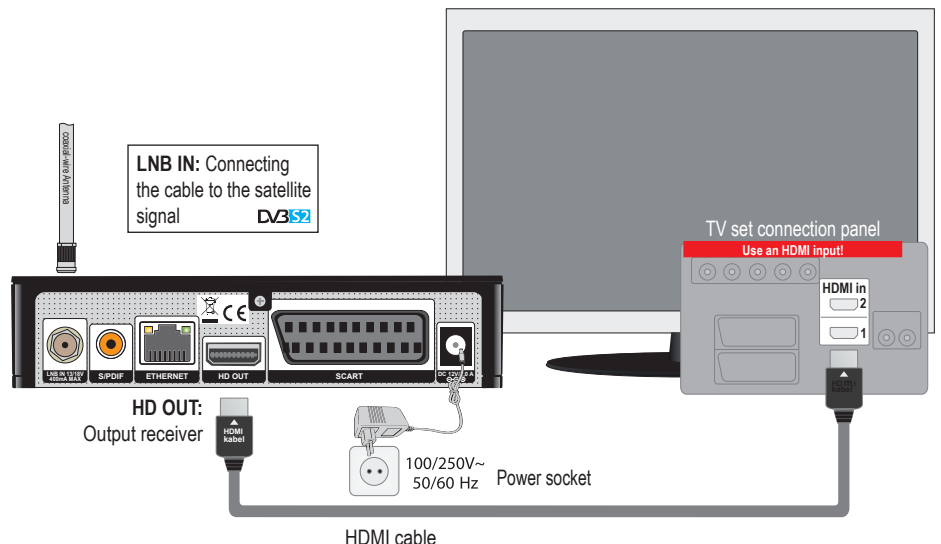

## 3 Remote Control UNIVERSAL 1



EDISION UNIVERSAL 1 REMOTE CONTROL is compatible with all EDISION STB's\*, plus it is pre-programmed with 5 basic functions for SAMSUNG & LG\*\* tv sets. Alternatively, you can program its 5 programmable buttons to any 5 functions of your TV.

**Power**  
Switches between operation and standby

**< (PREV)**  
Return to the previous channel/service or move to the end of the Service List or the Play List

**Help**  
This provides users with a quick guide of using Edision OS nino

**Menu**  
Open main menu & select sub menu using by navigation buttons

**EXIT**  
Close and return to the previous menu and screen

**RADIO - TV**  
Switch to TV mode.  
Switch to Radio mode

**COLOR BUTTONS**  
Activates certain menu functions.  
Usage instructions are shown in each OSD menu

**Audio**  
Select an audio track and a sound mode

**PLAY**  
Starts timeshift if available

**REC**  
Activates immediately recording-option



**NUMERIC KEY (0-9)**  
Control the numerical operation and change the Channel/Service number directly

**> (NEXT)**  
Go to the next channel/service or move to the beginning of the Service List or the Play List

**TIMER**  
Start timer function

**INFO**  
Displays the Electronic Program Guide (EPG) information if provided

**EPG**  
Displays the Electronic Program Guide (EPG) information if provided

**Mute**  
Mutes or unmutes the audio temporarily

**TEXT**  
Switch between the teletext and TV modes

**SUBTITLE**  
Display the subtitle language list

**Notes:** Many of the listed buttons have multiple functions, which, are displayed in the menus. Some buttons and functions are optional. Important functions and buttons are briefly explained below. The buttons to be used are marked in red in the diagrams.

## MANUAL INSTRUCTION FOR LEARN REMOTE CONTROL EDISION UNIVERSAL 1

Your set-top-box remote control has 5 learning-function keys, in the up right hand side TV keypad panel area. Each one can be used accordingly as the following example:

1. Turning your TV set ON/OFF [TV POWER]
2. Selecting screen RATIO [Auto, 16:9, 4:3, etc]
3. Increasing/decreasing volume [VOL+ , VOL-]
4. Command confirmation [BACK or EXIT]

The other 48 keys are for the control of the EDISION set-top-box.



### SET UP FOR LEARNING FUNCTION

- Press [TV POWER] key in the up right hand side TV keypad panel area continuously for 5 Sec. until the LED lights up and keep lighting, then release the key. This means the remote control is in the learning mode.
- Within 10 seconds, press the key in the original TV IR control, which needs to be learned, for example the [POWER] key, then the red LED is flashing. It means this button is ready to receive the learning signal.
- Aim the emission port of the original TV remote control at the front at the emission port at the front of your set-top box remote control (distance between these two ports has to be about 2~3 CM).
- Then press the key which is to be learned in your original TV remote control, for example the [POWER] key of your original TV remote control continuously for 3 seconds. If the red LED flashes quickly for three times and keep lighting, it means the set-top box remote control has succeeded in receiving the signal and you have completed the learning procedure of ON/OFF [TV POWER] key.
- Then release the [POWER] key of your original TV remote control.

If the copying procedure fails, the red LED will blink and stay OFF. In this case please repeat the procedure.

For the next programmable function, please repeat steps 1 to 3:

- Selecting screen ratio with RATIO [Auto, 16:9, 4:3, etc]
- Increasing/decreasing volume [VOL+ , VOL-]
- Command confirmation [BACK or EXIT]

Now you can operate your TV with the 5 programmed by you keys of your set-top box remote control. During the operation, the LED will flash to indicate that the signal is transmitted!

\* For EDISION STB compatibility, please visit our webpage

\*\*LG & SAMSUNG are brand names that belong solely to LG Electronics Inc. and Samsung Electronics Co., Ltd respectively. Any brand name reference in this text is only for informational purposes towards the consumer that is interested in the product.